

SKORIĆ - RASVJETA

**LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA**

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

LED ULIČNA SOLARNA RASVJETA



NEOJ2018-000



NEOJ2019-000



NEOJ2020-000



NEOJ2021-000

	30 LED Street Light	70W High Voltage Sodium Lamp	60 LED Street Light	100W High Voltage Sodium Lamp	90 LED Street Light	150W High Voltage Sodium Lamp	120 LED Street Light	250W High Voltage Sodium Lamp
Luminous Flux	1W LED 30	SON-T 70W 1	1W LED 60	SON-T 100W 1	1W LED 90	SON-T 150W 1	1W LED 120	SON-T 250W 1
Luminous Flux of one Light Source	90lm	6000lm	90lm	9000lm	90lm	15000lm	90lm	28000lm
Luminous Flux of the Whole Light	1800lm	2100lm	3880lm	3600lm	5860lm	6000lm	8110lm	11200lm
Average Illumination	25Lux/4M	26~27Lux/4M	22Lux/6M	19~21Lux/6M	18Lux/8M	18~21Lux/8M	17Lux/10M	19~21Lux/10M
Total Input Power	38W	105W	78W	150W	118W	225W	155W	375W
Electricity Consuming	152 kwh/ Year	421kwh/ Year	313kwh/ Year	602kwh/ Year	473kwh/ Year	903kwh/ Year	622kwh/ Year	1505kwh/ Year
Life Span	50000 Hours	28000 Hours	50000 Hours	28000 Hours	50000 Hours	28000 Hours	50000 Hours	28000 Hours

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

30 LED ULIČNA RASVJETA

30 LED SOLARNA ULIČNA SVJETILJKA





NEOJ2018-110 L-BOT™

Light Source: 1W high power LED
Color Temperature: 2000K ±200K
6500K ±500K
Luminous Flux: 1800lm
Central Illumination: 75Lux/4m

Beam Angle: Horizontal: 120° Vertical: 65°
Total LED Power: 30W
LED Working Voltage: 24VDC
Operating temperature: -30°C - +40°C
Peak Watt of Solar Module: 110Wp
Battery: maintenance-free LEAD-acid battery, 200AH/24V, Can work continuously for 5 days (8.5 hours per day) when full charged.
Controller: Special charge controller, with the function of light control, over-charge protection, overly discharge protection and protection against polarity reversal. After connecting with city electricity power, when encountering bad weather, and the energy of the battery is not enough, the street light will switch to city electricity power supply.

CE     IP65

30 LED Solar Streetlight (Single Head)

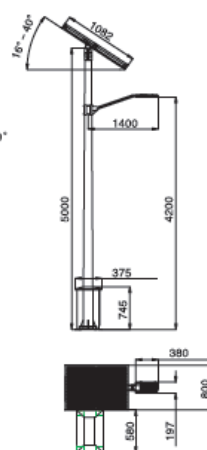

18 000,00kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split





NEOJ2018-210 L-BOT™

Light Source: 1W high power LED
Color Temperature: 2000K ±200K
6500 ±500K
Luminous Flux: 1800lm X 2
Central Illumination: 75lux/4m
Beam Angle: Horizontal: 120°
Vertical: 65°
Total Power Input: 30W X 2
LED Working Voltage: 24VDC
Operating temperature: -30°C - +40°C
Peak Watt of Solar Module: 220Wp
Battery: maintenance-free LEAD-acid battery,
200AH/24V, Can work continuously for 5
days (8.5 hours per day) when fully charged.
Controller: Special charge controller, with the function of light control, over-
charge protection, over discharge protection and protection against polar-
ity reversal. After connecting with city electricity power, when encountering
bad weather, and the energy of the battery is not enough, the street light
will switch to city electricity power supply.

CE    IP65

30 LED Solar Streetlight (Double Head)

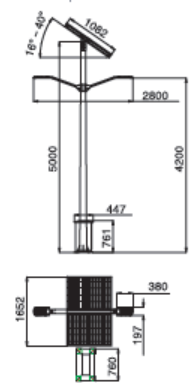

46 000,00 kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

30 LED ULIČNA SVJETILJKA(GLAVA)

NEOJ2018-000 L-BOT™



30 LED Streetlight Headpiece



Light Source: 1 W high power LEDs
Color Temperature: 2000K $\pm$ 200K
6500K $\pm$ 500K

Luminous Flux: 1800lm
Central Illumination: 75Lux/4m
Beam Angle: Horizontal: 120° Vertical: 65°
Input Voltage, Frequency: 100-240V AC,
50/60HZ
LED Working Voltage: 24VDC
Total LED Power : 38W
Installation Tube Diameter: $\varnothing$ 50mm(Max)
Operating temperature: -30°C - +40°C

CE    IP65



3.120,00kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

60 LED ULIČNA RASVJETA

60 LED SOLARNA ULIČNA SVJETILJKA





NEOJ2019-110 L-BOT™

Light Source: 1W high power LED
Color Temperature: 2000K ±200K
6500K ±500K
Luminous Flux: 3880lm
Central Illumination: 70Lux/6m
Beam Angle: Horizontal: 120° Vertical: 65°
Total Power Input: 60W

LED Working Voltage: 24VDC
Operating temperature: -30°C - +40°C
Peak Watt of Solar Module: 220Wp
Total Power Input Battery: maintenance-free LEAD-acid battery, 200AH/
24V, Can work continuously for 5 days (10 hours per day) when fully
charged
Controller: Special charge controller, with the function of light-control, over
charge protection, over discharge protection and protection against polarity
reversal. After connecting with city electricity power, when encountering
bad weather, and the energy of the battery is not enough, the street light
will switch to city electricity power supply.

CE     IP65

60 LED Solar Streetlight (Single Head)

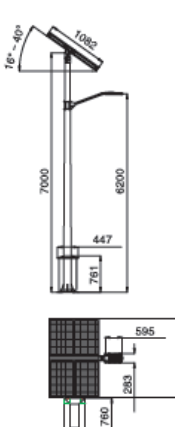

28 000,00 kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

60 LED ULIČNA SVJETILJKA(GLAVA)

NEOJ2019-000 L-BOT™



60 LED Streetlight Headpiece



Light Source: 1W high power LEDs
Color Temperature: 2000K $\pm$ 200K
6500K $\pm$ 500K

Luminous Flux: 3880lm
Central Illumination: 70lux/6m
Beam Angle: Horizontal: 120° Vertical: 65°
Input Voltage, Frequency: 100-240V AC,
50/60HZ
LED Working Voltage: 24VDC
Total Power Input: 78 W
Installation Tube Diameter: $\varnothing$ 60mm (Max)
Operating temperature: -30°C - +40°C

CE    IP65



6.296,00kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

90 LED ULIČNA RASVJETA

90 LED SOLARNA ULIČNA SVJETILJKA



NEOJ2020-110 L-BOT™



Light Source: 1W high power LED
Color Temperature: 2000K ±200K
6500K ±500K

Luminous Flux: 5860lm
Central Illumination: 5.6Lux/8m
Beam Angle: Horizontal: 120° Vertical: 65°
Total Power Input: 90W

LED Working Voltage: 24VDC
Operating temperature: -30°C - +40°C
Peak Watt of Solar Module: 330Wp
Total Power Input Battery: maintenance-free LEAD-acid battery, 200AH/
24V, Can work continuously for 5 days (8.5 hours per day) when fully
charged
Controller: Special charge controller, with the function of light-control, over
charge protection, over discharge protection and protection against polarity
reversal. After connecting with city electricity power, when encountering
bad weather, and the energy of the battery is not enough, the street light
will switch to city electricity power supply.

CE     IP65

90 LED Solar Streetlight (Single Head)

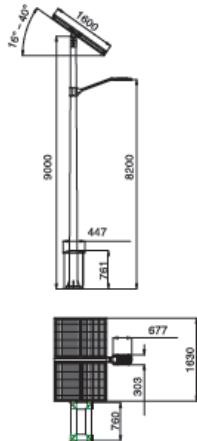

43 000,00 kn

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

90 LED ULIČNA SVJETILJKA(GLAVA)



NEOJ2020-000 L-BOT™

90 LED Streetlight Headpiece



Light Source: 1W high power LED
Color Temperature: 2000K ± 200K
6500K ± 500K
Luminous Flux: 5860lm
Central Illumination: 56lux/8m
Beam Angle: Horizontal: 120° Vertical: 65°
Input Voltage, Frequency: 100-240V AC,
50/60HZ
LED Working Voltage: 24VDC
Total LED Power : 118W
Installation Tube Diameter: Ø60mm(Max)
Operating temperature: -30°C - +40°C

CE IP65



VPC 7.650,00kn



NEOJ1029-000

Wire-Mounted Street Light



Light Source: 1W high power LEDs
Color Temperature: 2000K ± 200K
6500K ± 500K
Luminous Flux: 3880lm
Central Illumination: 70lux/6m
Beam Angle: Horizontal: 120° Vertical: 65°
Input Voltage, Frequency: 100-240V AC,
50/60HZ
LED Working Voltage: 24VDC
Total Power Input: 80W
Operating temperature: -30°C - +40°C

CE IP65



4.725,00

SKORIĆ - RASVJETA

LED RASVJETA ZA: PLOVILA, BAZENE, MARINE - PODVODNA RASVJETA
DEKORATIVNA - NOVOGODIŠNJA - ARHITEKTURALNA LED RASVJETA
PRODAJA - PROJEKTI - MONTAŽA

Tel / fax : +385/ 21 / 314 – 777 , 314 – 778 , 314 - 779
GMS: +385/91 953-61-72 , e-mail: skoric-rasvjeta@hi.t-com.hr
Ured: Kaštelanska bb, 21 000 Split

SD-75





75 LED Tunnel Light (SD-75) Technical Specifications

Light Source: 75 X 1 W high Power LED
Color Temperature: 2000K±300K 6500K±500K
Beam Angle: Horizontal: 120° Vertical: 65°
Luminous Flux: 5445lm
Input Voltage: AC100~240 V
Operating Voltage: 24V
Power Consumption: 95W
Operating Temperature: -30°C - +40°C

CE U A IP65

Distance	Central Illumination	Illumination Range
5m	60LUX	1.6 X 6m
6m	42LUX	2.0 X 8m
7m	31LUX	2.3 X 9m
8m	23LUX	2.6 X 10m

LED Tunnel Lighting Fixture

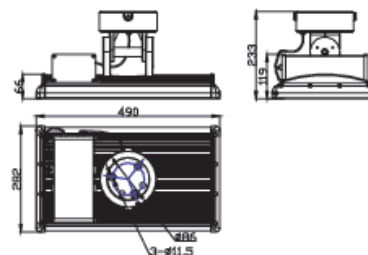

5.900,00kn

Cijene su izražene bez PDV-a.

Cijene za montažu rasvjete i održavanje na upit.